HERCULES
A SENNECA COMPANY

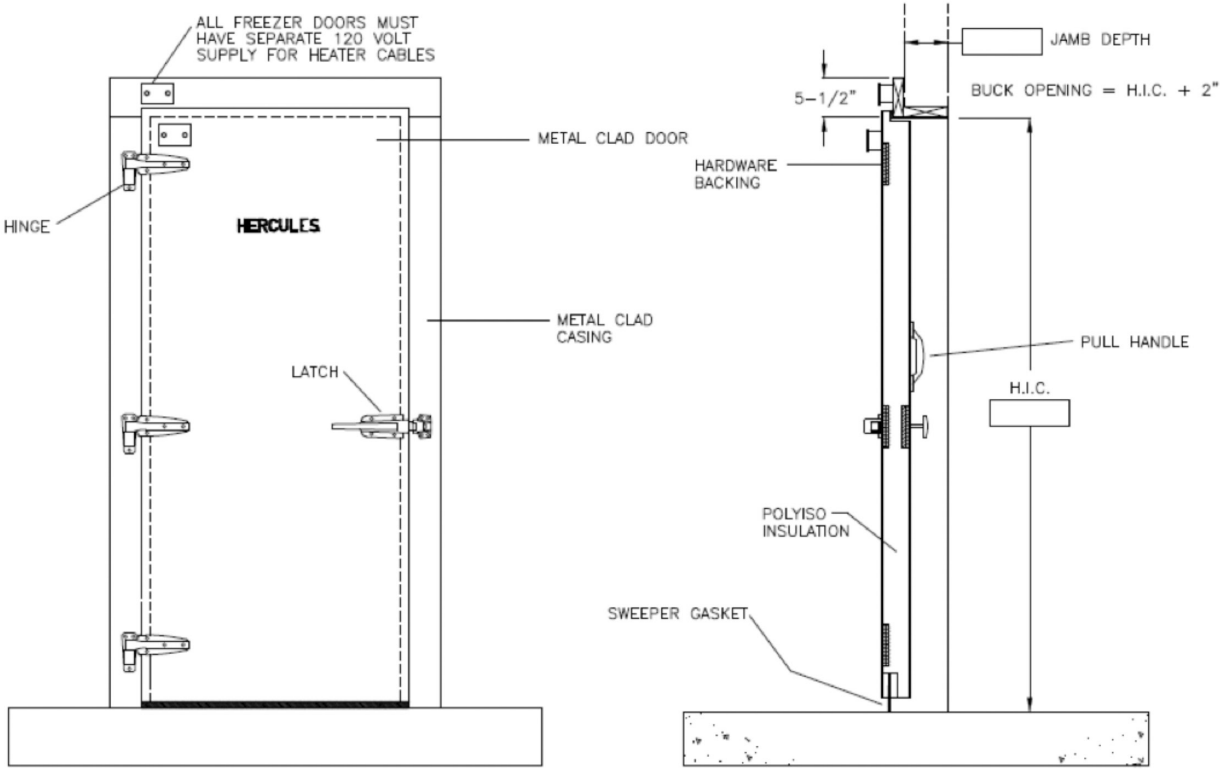

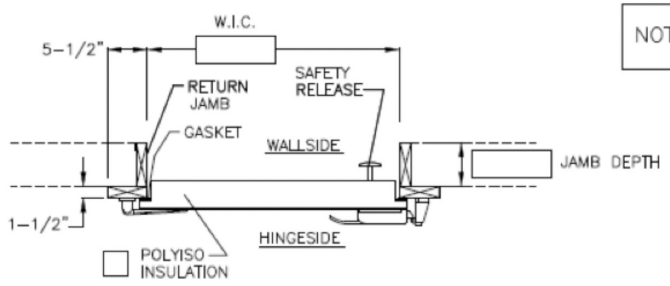

NOTE: LEFT SWING SHOWN, RIGHT SWING OPPOSITE

INSTALLATION REQUIREMENTS

I. THE FLOOR UNDER THE DOOR MUST BE LEVEL AND SMOOTH

II. THE WALL BEHIND THE DOOR FRAME MUST BE SMOOTH AND IN A COMMON PLANE

DOOR PANEL AND FRAME

1. DOOR THICKNESS
   - ☐4" ☐6" (FREEZER ONLY)
2. TEMPERATURES
   - WALL SIDE HINGESIDE
   - =_____°F =_____°F
3. SWING
   - ☐LEFT
   - ☐RIGHT
4. PANEL AND FRAME CLADDING
   - ☐WHITE STUCCO EMBOSSED GALV STEEL
   - ☐SANDSTONE STUCCO EMBOSSED GALV STEEL
   - ☐MILL FINISH STUCCO EMBOSSED STEEL
   - ☐STAINLESS STEEL
   - ☐WHITE STUCCO EMBOSSED ALUMINUM
   - ☐MILL FINISH STUCCO EMBOSSED ALUMINUM
5. LATCH
   - ☐PADLOCKABLE ☐KEYED LATCH
     - ☐WHITE POWDER COAT
     - ☐STAINLESS STEEL
     - ☐OTHER
6. INTERIOR RELEASE
   - ☐SAFETY RELEASE W/ NYLON PUSH ROD
   - ☐PUSH BAR
   - ☐PANIC BAR – NO EXTERIOR RE-ENTRY
   - ☐PANIC BAR – WITH KEYED LEVER
   - ☐OTHER
7. HINGE
   - ☐WHITE POWDER COAT
   - ☐STAINLESS STEEL
   - ☐OTHER
8. FASTENERS
   - ☐THROUGH BOLTS
   - ☐GALV LAG BOLTS
   - ☐OTHER
9. JAMBS
   - JAMB DEPTH_____
   - ☐HDPE CLAD IN SAME MATL AS DOOR
   - ☐CHANNEL TRIM
   - ☐OTHER

OPTIONS

10. ☐FREEZER DOOR
    - HEATER WIRE RUN THROUGH 3 SIDES OF DOOR FRAME AS WELL AS BOTTOM OF DOOR
11. ☐INSIDE CASINGS
12. ☐DOOR CLOSER
13. ☐HOOD
    - ☐MATCHED TO FACE OF DOOR
    - ☐OTHER
14. ☐KICKPLATES
    - ☐HINGESIDE ☐WALLSIDE
    - HEIGHT: ☐18" ☐24" ☐36" ☐48" ☐OTHER
      - ☐ALUMINUM DIAMOND PLATE
      - ☐18 GA. STAINLESS STEEL
      - ☐16 GA. GALV. STEEL
      - ☐OTHER
15. ☐VISION PANEL
    - ☐12" X 12" INSULATED
    - ☐12" x 12" HEATED
    - ☐OTHER

	DOOR NO.	QTY.	W.I.C.	H.I.C.	USE	SWING	FINISH COVERING	FINISH GAGE	HARDWARE FINISH	RETURN DEPTH

HERCULES
A SENNECA COMPANY

FLUSH SILL INFITTING DOOR

SCALE: NONE		DRAWN BY
DATE:		
For:		Job No.
		DRAWING NUMBER