HERCULES
A SENNECA COMPANY

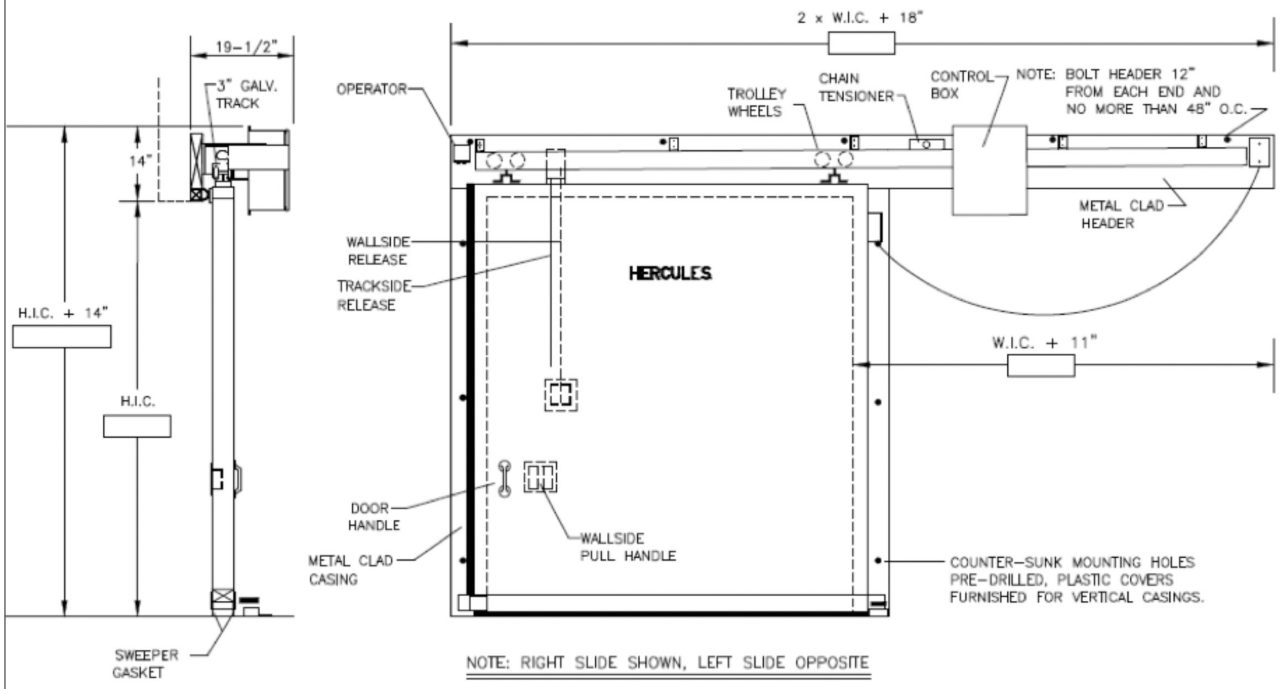

NOTE: RIGHT SLIDE SHOWN, LEFT SLIDE OPPOSITE

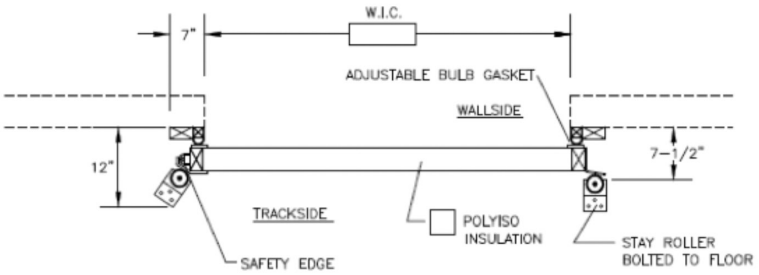

NOTE: ALL FREEZER DOORS MUST HAVE SEPERATE 120 VOLT SUPPLY FOR HEATER CABLES

INSTALLATION REQUIREMENTS

I. THE FLOOR UNDER THE DOOR MUST BE LEVEL AND SMOOTH

II. THE WALL BEHIND THE DOOR FRAME MUST BE SMOOTH AND IN A COMMON PLANE

DOOR PANEL AND FRAME

1. DOOR THICKNESS
   - ☐ 4"
   - ☐ 6" (FREEZER ONLY)
2. TEMPERATURES
   WALL SIDE HINGESIDE
   =_____°F =_____ F
3. SLIDE DIRECTION
   - ☐ LEFT
   - ☐ RIGHT
4. PANEL AND FRAME CLADDING
   - ☐ WHITE STUCCO EMBOSSED GALV STEEL
   - ☐ MILL FINISH STUCCO EMBOSSED STEEL
   - ☐ STAINLESS STEEL
   - ☐ SANDSTONE STUCCO EMBOSSED GALV STEEL
   - ☐ WHITE STUCCO EMBOSSED ALUMINUM
   - ☐ MILL FINISH STUCCO EMBOSSED ALUMINUM
5. JAMBS
   JAMB DEPTH_____
   - ☐ HDPE CLAD IN SAME MATL AS DOOR
   - ☐ CHANNEL TRIM
   - ☐ OTHER
6. OPERATOR
   - ☐ STANDARD OPERATOR
   - ☐ HIGH SPEED OPERATOR

OPTIONS

7. ☐ FREEZER DOOR
   HEATER WIRE RUN AROUND PERIMETER OF DOOR LEAF ON WALLSIDE
8. ☐ INSIDE CASINGS
9. ☐ HOOD
   - ☐ MATCHED TO FACE OF DOOR
   - ☐ OTHER
10. ☐ KICKPLATES
    - ☐ HINGESIDE
    - HEIGHT: ☐ 18" ☐ 24" ☐ 36" ☐ 48" ☐ OTHER
      - ☐ ALUMINUM DIAMOND PLATE
      - ☐ 18 GA. STAINLESS STEEL
      - ☐ 16 GA. GALV. STEEL
      - ☐ OTHER
11. ☐ VISION PANEL
    - ☐ 12" X 12" INSULATED
    - ☐ 12" x 12" HEATED
    - ☐ OTHER
12. ☐ LOCKING DEVICE
    - ☐ TRACKSIDE ☐ WALLSIDE
      - ☐ WITH POWER CUTOFF AND SAFETY RELEASE
      - ☐ WITH POWER CUTOFF – NO SAFETY RELEASE
13. ☐ RADIO CONTROL
14. ☐ PHOTOCELL ☐ TO OPEN ☐ AS SAFETY
15. ☐ MOTION DETECTOR ☐ TO OPEN ☐ AS SAFETY
16. ☐ LOOP DETECTOR ☐ TO OPEN ☐ AS SAFETY
17. ☐ TIMER DELAY CLOSE

	DOOR NO.	QTY.	W.I.C.	H.I.C.	USE	VOLTAGE	LOCK	FINISH COVERING	FINISH GAGE	SLIDE

HERCULES
A SENNECA COMPANY

ELECTRIC HORIZONTAL SLIDING DOOR

SCALE: NONE		DRAWN BY
DATE		
For:		Job No.
		DRAWING NUMBER