
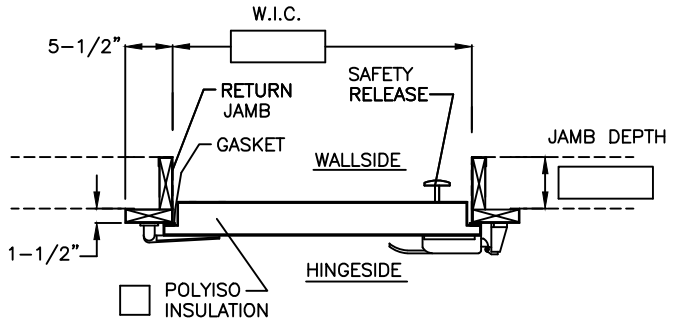


BUCK OPENING = W.I.C. + 4"

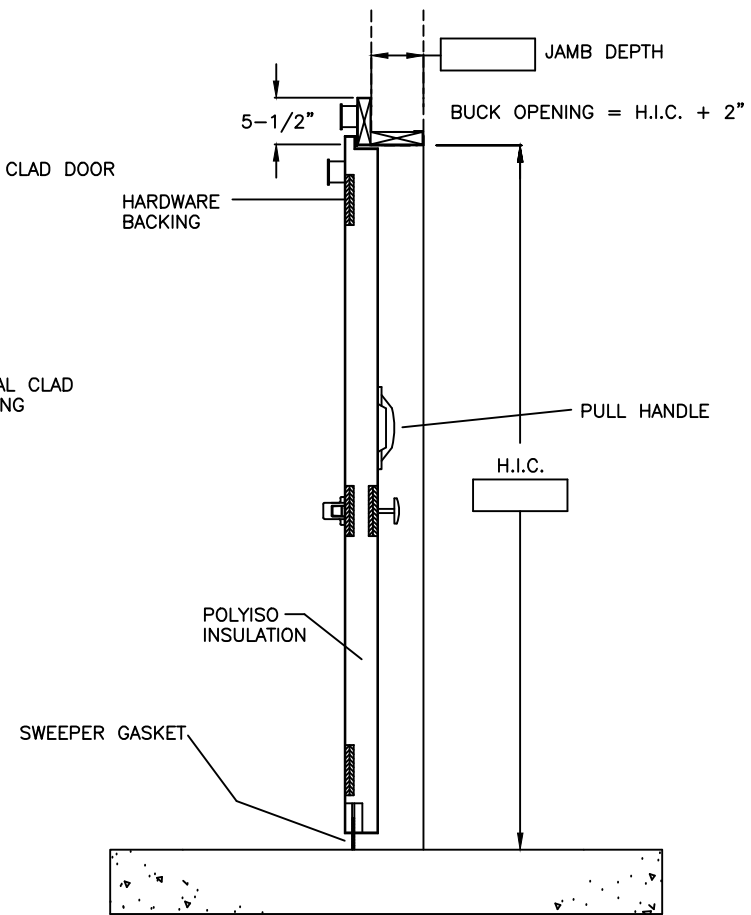

NOTE: LEFT SWING SHOWN, RIGHT SWING OPPOSITE

SUBMITTAL DRAWING NOTES — PLEASE SPECIFY ALL AREAS CHECKED OTHER

| OPTION NUMBER | DESCRIPTION |
|---------------|-------------|
|               |             |
|               |             |
|               |             |
|               |             |

**INSTALLATION REQUIREMENTS**

- THE FLOOR UNDER THE DOOR MUST BE LEVEL AND SMOOTH
- THE WALL BEHIND THE DOOR FRAME MUST BE SMOOTH AND IN A COMMON PLANE

**DOOR PANEL AND FRAME**

- DOOR THICKNESS  
4" 6" (FREEZER ONLY)
- TEMPERATURES  
WALL SIDE HINGESIDE  
= \_\_\_\_\_ °F = \_\_\_\_\_ °F
- SWING  
LEFT  
RIGHT
- PANEL AND FRAME CLADDING  
WHITE STUCCO EMBOSSED GALV STEEL  
SANDSTONE STUCCO EMBOSSED GALV STEEL  
MILL FINISH STUCCO EMBOSSED STEEL  
STAINLESS STEEL  
WHITE STUCCO EMBOSSED ALUMINUM  
MILL FINISH STUCCO EMBOSSED ALUMINUM
- LATCH  
PADLOCKABLE KEYED LATCH  
WHITE POWDER COAT  
STAINLESS STEEL  
OTHER
- INTERIOR RELEASE  
SAFETY RELEASE W/ NYLON PUSH ROD  
PUSH BAR  
PANIC BAR — NO EXTERIOR RE-ENTRY  
PANIC BAR — WITH KEYED LEVER  
OTHER
- HINGE  
WHITE POWDER COAT  
STAINLESS STEEL  
OTHER
- FASTENERS  
THROUGH BOLTS  
GALV LAG BOLTS  
OTHER
- JAMBS  
JAMB DEPTH \_\_\_\_\_  
HDPE CLAD IN SAME MATL AS DOOR  
CHANNEL TRIM  
OTHER

**OPTIONS**

- FREEZER DOOR  
HEATER WIRE RUN THROUGH 3 SIDES OF DOOR FRAME AS WELL AS BOTTOM OF DOOR
- INSIDE CASINGS
- DOOR CLOSER
- HOOD  
MATCHED TO FACE OF DOOR  
OTHER
- KICKPLATES  
HINGESIDE WALLSIDE  
HEIGHT: 18" 24" 36" 48" OTHER  
ALUMINUM DIAMOND PLATE  
18 GA. STAINLESS STEEL  
16 GA. GALV. STEEL  
OTHER
- VISION PANEL  
12 3/4" X 12 3/4" INSULATED  
12 3/4" X 12 3/4" HEATED  
OTHER

| JOB | DOOR NO. | QTY. | W.I.C. | H.I.C. | USE | SWING | FINISH   |      | HARDWARE FINISH | RETURN DEPTH |
|-----|----------|------|--------|--------|-----|-------|----------|------|-----------------|--------------|
|     |          |      |        |        |     |       | COVERING | GAGE |                 |              |
|     |          |      |        |        |     |       |          |      |                 |              |
|     |          |      |        |        |     |       |          |      |                 |              |
|     |          |      |        |        |     |       |          |      |                 |              |
|     |          |      |        |        |     |       |          |      |                 |              |
|     |          |      |        |        |     |       |          |      |                 |              |

**HERCULES**  
Renowned, resilient doors. By Kingspan

**FLUSH SILL INFITTING DOOR**

|             |                |
|-------------|----------------|
| SCALE: NONE | DRAWN BY       |
| DATE:       |                |
| For:        | Job No.        |
|             | DRAWING NUMBER |