


BUCK OPENING = W.I.C. + 4"

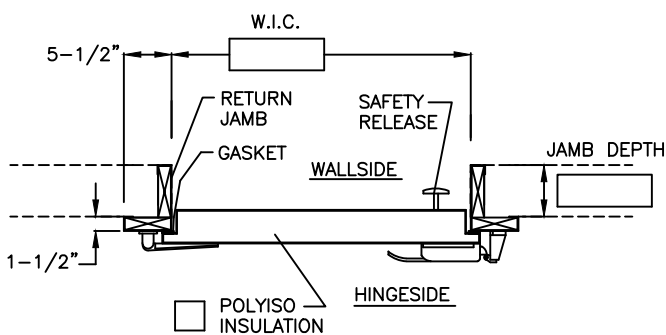

NOTE: LEFT SWING SHOWN, RIGHT SWING OPPOSITE

SUBMITTAL DRAWING NOTES — PLEASE SPECIFY ALL AREAS CHECKED OTHER

OPTION NUMBER	DESCRIPTION

**INSTALLATION REQUIREMENTS**

- I. THE FLOOR UNDER THE DOOR MUST BE LEVEL AND SMOOTH
- II. THE WALL BEHIND THE DOOR FRAME MUST BE SMOOTH AND IN A COMMON PLANE

**DOOR PANEL AND FRAME**

1. DOOR THICKNESS  
4" 6" (FREEZER ONLY)
2. TEMPERATURES  
WALL SIDE HINGESIDE  
= \_\_\_\_\_ °F = \_\_\_\_\_ °F
3. SWING  
LEFT  
RIGHT
4. PANEL AND FRAME CLADDING  
WHITE STUCCO EMBOSSED GALV STEEL  
SANDSTONE STUCCO EMBOSSED GALV STEEL  
MILL FINISH STUCCO EMBOSSED STEEL  
STAINLESS STEEL  
WHITE STUCCO EMBOSSED ALUMINUM  
MILL FINISH STUCCO EMBOSSED ALUMINUM
5. LATCH  
PADLOCKABLE KEYPED LATCH  
WHITE POWDER COAT  
STAINLESS STEEL  
OTHER
6. INTERIOR RELEASE  
SAFETY RELEASE W/ NYLON PUSH ROD  
PUSH BAR  
PANIC BAR — NO EXTERIOR RE-ENTRY  
PANIC BAR — WITH KEYED LEVER  
OTHER
7. HINGE  
WHITE POWDER COAT  
STAINLESS STEEL  
OTHER
8. FASTENERS  
THROUGH BOLTS  
GALV LAG BOLTS  
OTHER
9. JAMBS  
JAMB DEPTH \_\_\_\_\_  
HDPE CLAD IN SAME MATL AS DOOR  
CHANNEL TRIM  
OTHER

**OPTIONS**

10. FREEZER DOOR  
HEATER WIRE RUN THROUGH ALL 4 SIDES OF THE DOOR FRAME
11. INSIDE CASINGS
12. DOOR CLOSER
13. HOOD  
MATCHED TO FACE OF DOOR  
OTHER
14. KICKPLATES  
HINGESIDE WALLSIDE  
HEIGHT: 18" 24" 36" 48" OTHER  
ALUMINUM DIAMOND PLATE  
18 GA. STAINLESS STEEL  
16 GA. GALV. STEEL  
OTHER
15. VISION PANEL  
12 3/4" X 12 3/4" INSULATED  
12 3/4" X 12 3/4" HEATED  
OTHER

DOOR NO.	QTY.	W.I.C.	H.I.C.	SWING	USE	FINISH		HARDWARE FINISH	RETURN DEPTH
						COVERING	GAGE		

**HERCULES**  
Renowned, resilient doors. By Kingspan

**HIGH SILL INFITTING DOOR**

SCALE: NONE	DRAWN BY
DATE:	
For:	Job No.
	DRAWING NUMBER