
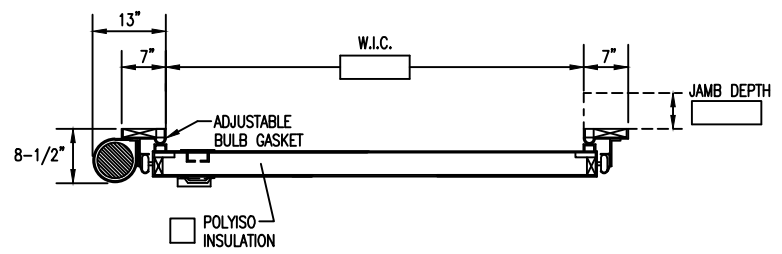


ALL FREEZER DOORS MUST HAVE SEPARATE 120 VOLT SUPPLY FOR HEATER CABLES

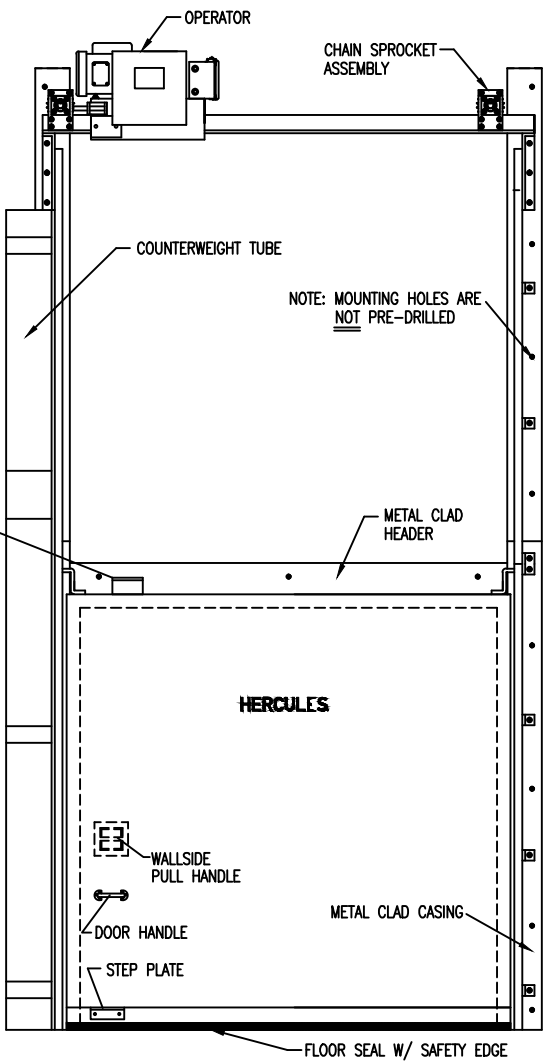

DRAWING NOTES—PLEASE SPECIFY ALL AREAS CHECKED OTHER

OPTION NUMBER	DESCRIPTION

INSTALLATION REQUIREMENTS

- I. THE FLOOR UNDER THE DOOR MUST BE LEVEL AND SMOOTH
- II. THE WALL BEHIND THE DOOR FRAME MUST BE SMOOTH AND IN A COMMON PLANE

DOOR PANEL AND FRAME

1. DOOR THICKNESS
4" 6" (FREEZER ONLY)
2. TEMPERATURES
WALL SIDE TRACKSIDE
= _____ °F = _____ °F
3. PANEL AND FRAME CLADDING
WHITE STUCCO EMBOSSED GALV STEEL
SANDSTONE STUCCO EMBOSSED GALV STEEL
MILL FINISH STUCCO EMBOSSED STEEL
STAINLESS STEEL
WHITE STUCCO EMBOSSED ALUMINUM
MILL FINISH STUCCO EMBOSSED ALUMINUM
4. JAMBS
JAMB DEPTH _____
HDPE CLAD IN SAME MATL AS DOOR
CHANNEL TRIM
OTHER _____

OPTIONS

5. FREEZER DOOR
HEATER WIRE RUN AROUND PERIMETER OF DOOR LEAF AND IN BOTTOM OF DOOR
6. INSIDE CASINGS
7. HOOD
MATCHED TO FACE OF DOOR
OTHER _____
8. KICKPLATES
TRACKSIDE WALLSIDE
HEIGHT: 18" 24" 36" 48" OTHER
ALUMINUM DIAMOND PLATE
18 GA. STAINLESS STEEL
16 GA. GALV. STEEL
OTHER _____
9. VISION PANEL
12 3/4" X 12 3/4" INSULATED
12 3/4" X 12 3/4" HEATED
OTHER _____
10. LOCKING DEVICE
TRACKSIDE WALLSIDE
WITH POWER CUTOFF & SAFETY RELEASE
WITH POWER CUTOFF - NO RELEASE
11. RADIO CONTROL
12. TIMER DELAY CLOSE
13. PHOTOCELL
TO OPEN AS SAFETY
14. MOTION DETECTOR
TO OPEN AS SAFETY
15. LOOP DETECTOR
TO OPEN AS SAFETY

DOOR NO.	QTY.	W.I.C.	H.I.C.	USE	SWING	FINISH COVERING		HARDWARE FINISH	RETURN DEPTH
						GAGE			

HERCULES
Renowned, resilient doors. By Kingspan

ELECTRIC VERTICAL LIFT DOOR

SCALE: NONE	DRAWN BY
DATE:	
For:	Job No.
	DRAWING NUMBER